


# MURRAY RIVER METAL COLLECTION

## Metal Tile Sideview Specification

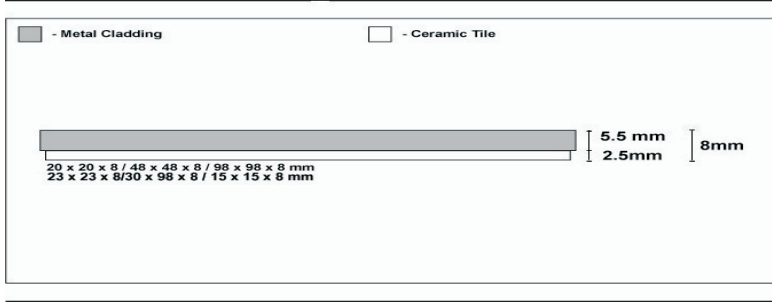

## **Specification ( Stainless Steel Grade 304 )**

	Hardness	( N / mm <sup>2</sup> ) Tensile Strength	( N / mm <sup>2</sup> ) Yield Strength	( % ) Elongation
Requirement	HV 200 max	520 min	205 min	40 min
Result	158 - 160	676 - 693	264 - 281	62 - 66

## **Specification ( Ceramic Tile Base )**

	Requirement	Result
Acid resistance	10% HCL ( V/V ) ( 24h )	Grade B
Alkali resistance	10% KOH ( M/V ) ( 24h )	Grade A
Water absorption	≤ 0.5 %	0.3%
Thickness	±10.0%	± 7.3
Dimension	± 1.2%	-1.2 -0.4

## **Copper Tile**

- Copper tiles are made from the solid copper - Overtime they will exhibit the natural oxidising hues for which copper is famous.

Copper tile is not suitable for exterior use

Copper tile can be used for both wall and floor

Each batch of Copper Antique will vary depending on the weather or more the chemical reaction, during the antique process, of individual lots of sheet copper.

## **Stainless Steel Tile**

Stainless steel Tiles are both suitable for interior and exterior

Stainless Steel Tiles can be used for both wall and floor

## **Maintenance**

- Cleaning with damp soft cloth or soapy water and sponge if required.

Acid or corrosive solutions not recommended.